

HOW TO INSTALL LIFT CHAIR BACK



1

Remove all plastic and foam coverings



2

Lay back onto base, cushion down.
Locate locking slip on back and base




3

Tilt back down towards base,
interlocking slips on to both sides



4

Use body weight to click into place, and
secure velcro on back flap

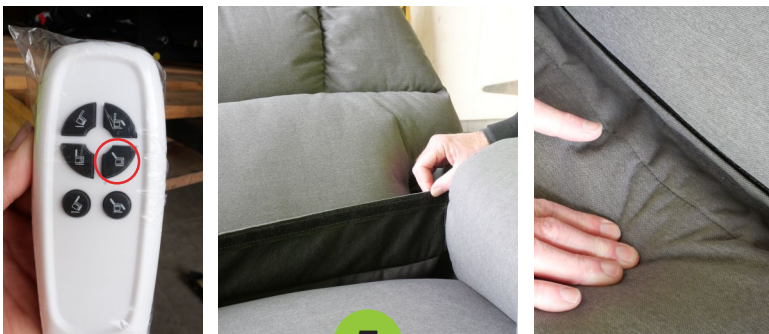

5

Recline chair back completely,
locate inner flap and velcro down



6

Lastly, position chair back
into neutral seated position.